

## G.I Socket

Art. No. 105



### Specifications & Features


- Screwed female left & right hand threaded ends to BSP.
- High quality antirust coating on threads.
- Hot galvanised with uniform zinc coating.
- Superior grade malleability to ensure crack free installation.
- Heavy pattern & superb in quality and performance.
- Functionally sturdy and visually attractive.
- Protruded external ribs to facilitate comfortable wrenching.

### Suitable For

Steam	Water	Oil	Air	Gases
<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>

### Test Pressure

25kg/cm<sup>2</sup>g (Hydraulic)

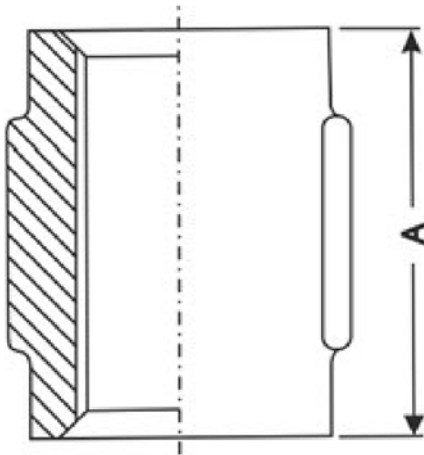

### Dimensional Data

Nominal Size (mm)	A	±
15	40	2
20	44	2
25	48	2
32	53	2.5
40	58	2.5
50	65	2.5
65	85	3
80	95	3
100	95	3
150	122	3.5