

G.I Cross

Art. No. 109



Specifications & Features


- Screwed female ends to BSP.
- Full bore & perfect right angle to ensure unobstructed flow.
- High quality antirust coating on threads.
- Hot galvanised with uniform zinc coating.
- Superior grade malleability to ensure crack free installation.
- Heavy pattern & superb in quality and performance.
- Functionally sturdy and visually attractive.
- Full threaded length with precise right angled three sided diversion.

Suitable For

Steam	Water	Oil	Air	Gases
<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>

Test Pressure

25kg/cm²g (Hydraulic)

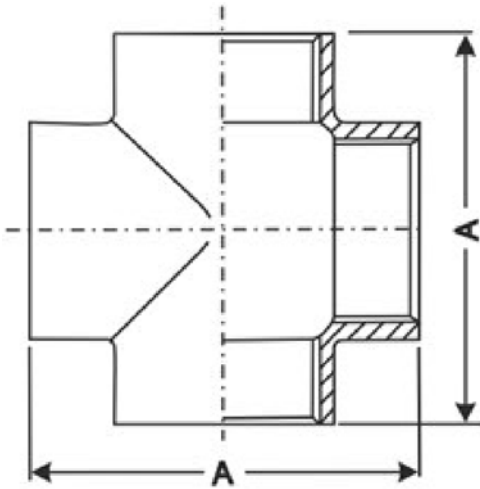

Dimensional Data

Nominal Size (mm)	A	±
15	63	2.5
20	72	2.5
25	79	3
32	90	3
40	100	3
50	116	3.5
65	140	3.5
80	156	4
100	192	4