

Cap Plug

Art. No. 112



Specifications & Features

- High quality antirust all over coating.
- Screwed female end to BSP.
- Superior grade malleability to ensure crack free installation.
- Functionally sturdy and visually attractive.
- Also available with hot galvanized zinc coating.
- Perfect square head with protruded ribs for comfortable spanning & a slip-free grip.


Suitable For

Steam	Water	Oil	Air	Gases
○	●	●	●	●

Test Pressure

25kg/cm²g (Hydraulic)

Dimensional Data

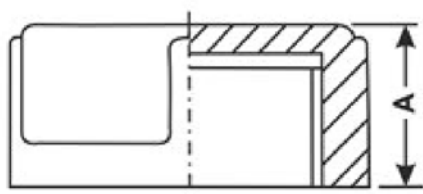

Nominal Size (mm)	A	±
15	19	1.5
20	22	1.5
25	24	1.5
32	27	1.5
40	27	1.5
50	32	2
65	35	2
80	38	2
100	45	2